


# XQY-DC3-1/40-10KE

## 定向耦合器

## Directional Coupler

Parameters	Specifications
频率范围 Frequency Range	1000 ~ 40000 MHz
插入损耗 Insertion Loss	≤ 2.5 dB
主路驻波 Primary VSWR	Type.1.5 / Max.1.7
支路驻波 Secondary VSWR	Type.1.5 / Max.1.7
方向性 Directivity	Min.10dB
灵敏度 Frequency Sensitivity	±1.0dB
耦合度 Nominal Coupling	10 ±1.2dB
阻抗 Impedance	50 Ohms
端口接头 Input/Output Connectors	2.92-Female 不锈钢
承受功率 Power Rating	30W
工作温度 Operation Temperature	-55°C ~ +100°C
表面处理 Surface Finishing	Black paint

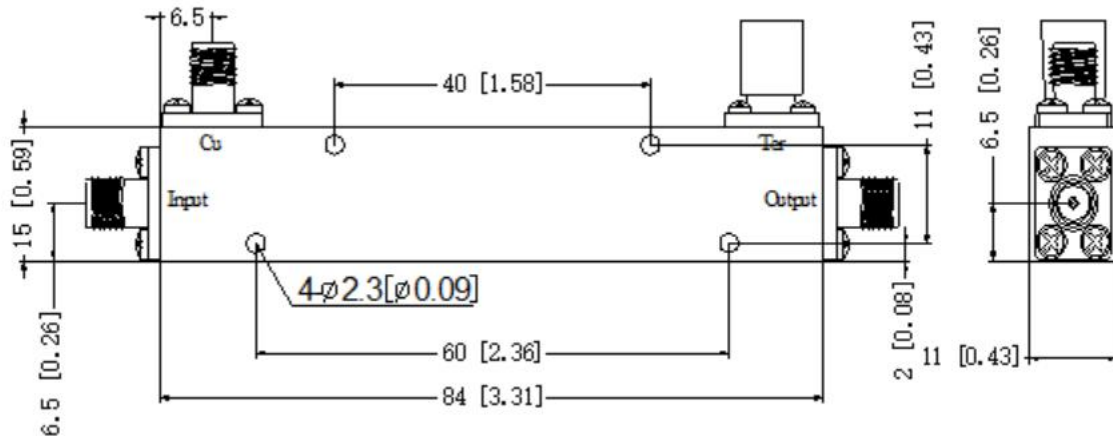

注: 尺寸(mm/[英寸]), 一般公差(± 0.3)

Note: Dimensions (mm / [inch]), General tolerance (±0.3)